


How to disassemble Cloud Monitor camera


2010-10-18 T.Sasaki
2011-04-11 modified

Cloud monitor

Nov. 26,2008 at Karasu

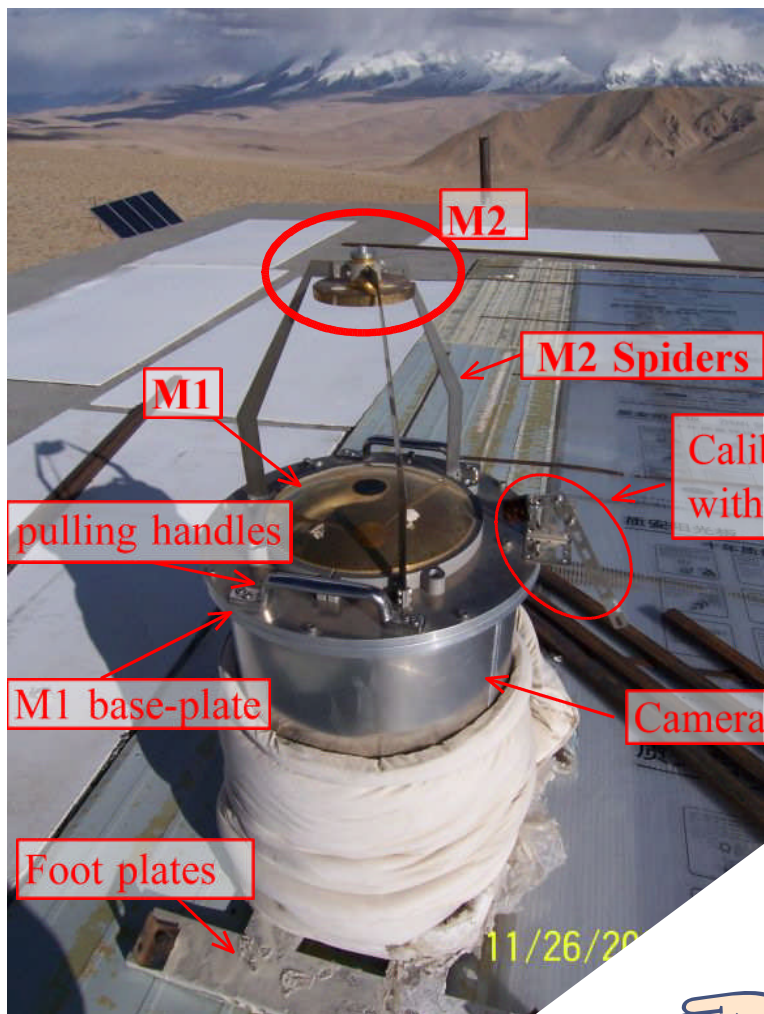

- ① remove M2 stopper, using hand to protect the M2 drop-off .
- ② remove M2 (M2 is stored in case by wrapping it with clothes)

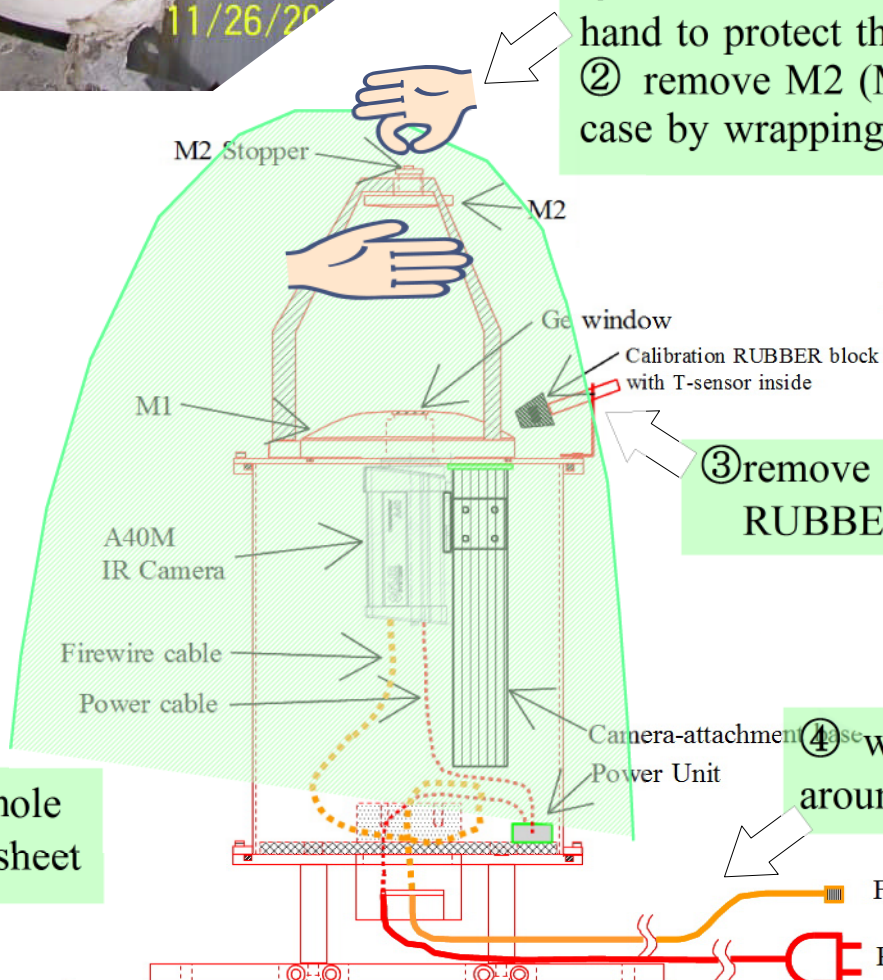

- ③ remove Calibration RUBBER block


- ⑤ cover the whole with clothes or sheet

- ④ wrap codes around the tank

FireWire(max 4.5m)

Power(220V)

⑥ pack the camera-control PC with hard disk and UPC.
(⑥-1, ⑥-2 shown below.)

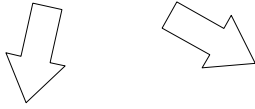


⑥-1 pack cables and other parts left at Karasu



⑥-2 pack the camera-control PC with hard disk and UPC

⑦ check a Parts List to pack everything or not ?



Parts List of Cloud Monitor Camera

- P1) CloudMon
- P2) M2 with a M2 stopper
- P3) a calibration rubber block with thermometer inside
- P4) Note-PC
- P5) Hard disk
- P6) UPS
- P7) other parts left at Karasu and at Kashi